

**Free sockets**

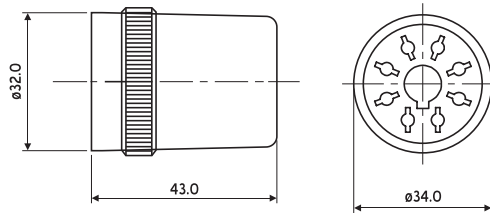

Approval



Ordering code

**DS08F**

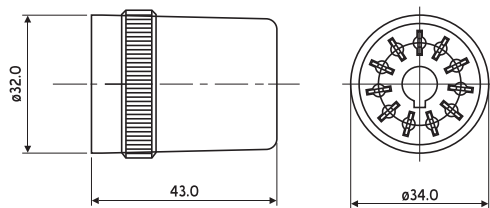
Socket 8 pin



Ordering code

**DS11F**

Socket 11 pin



Standard conformity	EN 60947-5-1 IEC 947-5-1
Material	Flame retardant thermoplastic material (UL94V-O)
Colour	Black
Rating	10 A AC/DC, 240V rms.
Dielectric strength	1500V rms. for 1 minute
Insulation resistance	1000Mohms min. at 500V DC
Temperature range	-45°C to +120°C
Terminals	Solder
Cable grip	Built-in

All dimensions are in mm.  
Due to continuous improvement in products, we reserve the right to alter specifications without prior notice