Two pole / Four pole, Screw terminal sockets

CE Approval CSA C US

Ordering code	**HDS08** 2 Pole
Rating	10 A, 240V AC
Mounting	DIN rail EN 50022, Two M4 screws

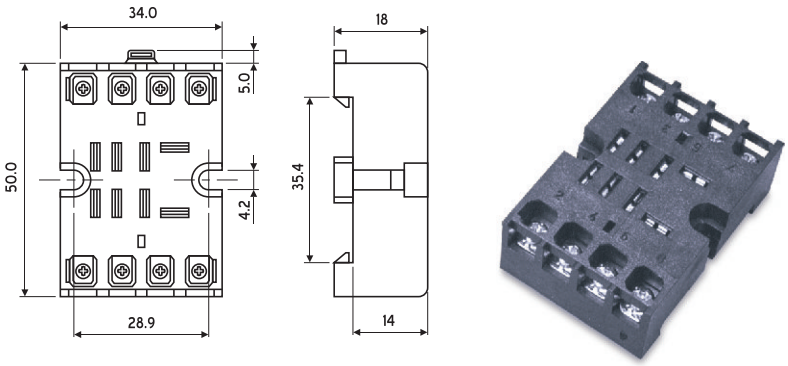

Ordering code	**ERS14M** 4 Pole	*__ERS08M__ 2 Pole
Rating	5 A, 240V AC	
Mounting	DIN rail EN 50022, Two M4 screws	

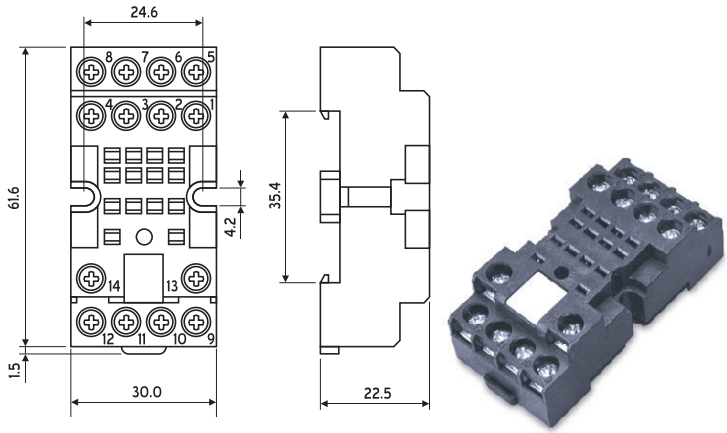

Standard conformity	EN 60947-5-1 IEC 947-5-1
Material	Flame retardant thermoplastic material (UL94V-O)
Colour	Black
Dielectric strength	2000V AC rms. for 1 minute
Insulation resistance	1000Mohms min. at 500V DC
Temperature range	-45°C to +120°C
Terminals	M3 screws with captive washers

Note : Retaining clip **RC1** available for **HDS08** Series relay sockets.
Retaining clip **RC2** available for **ERS14M** Series relay sockets.

*ERS14M socket without pins in cavities 2, 3, 6, 7, 10 & 11
Add suffix 'C' for relay sockets with retaining clip. Ordering code 2 pole socket : HDS08C
4 pole socket : ERS14MC

All dimensions are in mm.
Due to continuous improvement in products, we reserve the right to alter specifications without prior notice